

BLUE CARE

NEGATIVE CONSERVATION CABINET

46

BLUE CARE 46 are one compartment, one door Negative Conservation Cabinets, designed to hold 400x600mm trays, for the conservation of products already at negative temperature.



technical data	
Number of doors	1
Operating temperature	-10°C to -22°C
Number of levels	20
Spacing between levels	57 mm
Gross capacity	489 L
Refrigerating power at -30°C	453 W
Fluid	R290
Unit	Built-in
Defrost	hot gas
Valve	Supplied standard with solenoid
Gross weight	140 kg
Dimensions (LxPxH)	630 x 815 x 2085 mm
Packing (LxPxH)	835 x 930 x 2138 mm
connections	
Electrical supply	220-240V / IPH+T
Frequency	50 Hz
Absorbed power	810 W
Rated current	3,7 A
energy performance	
Energetic class	D
Energy efficiency index	50,2
Annual consumption	1514 kW/year
24h consumption	4,148 kW/h/24h
Climate class	5


Features

- + Equipped with 20 pairs of slides for 400x600mm grids.
- + AISI 304 stainless steel grids and slide rails.
- + Control with flush-mounted electronic display.
- + Self-closing door with 105° stop, right-hand hinges.
- + Lock with key.
- + Indirect-ventilated refrigeration.
- + Easily replaceable magnetic door seals.
- + AISI 304 stainless steel handle, 2mm thick.
- + 75mm thick, CFC/HCFC-free insulation.
- + AISI 304 stainless steel exterior and interior finish.
- + Galvanized/colaminated steel exterior back, bottom and interior of technical compartment.
- + Rounded internal corners for maximum hygiene.
- + Automatic ventilation shut-off when door is opened.
- + Feet in AISI 304 stainless steel, height-adjustable from 100 to 150mm.
- + LED interior lighting.
- + Optional door pedal and wheels kit.

NON CONTRACTUAL DATA

IMPLEMENTATION

DIMENSIONS AND CONNECTIONS

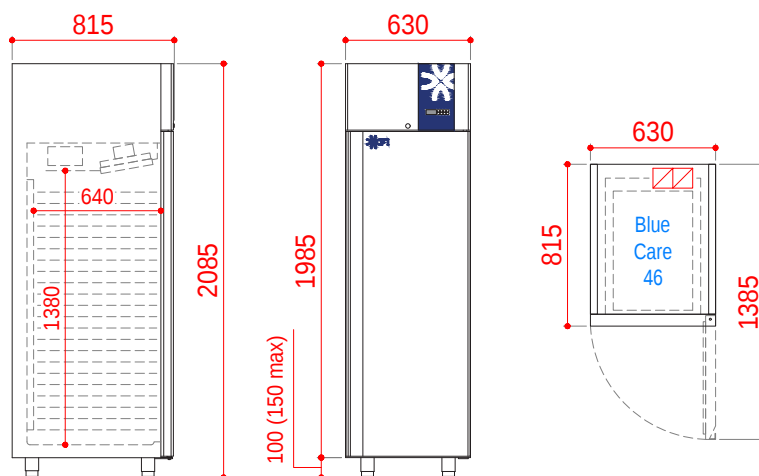


side view

front view

top view




Pavailler Solution :
Single-phase electric cable.



At customer's expense:

Wall socket.
Male and female, height 2.20m.



Benefit
limits

2.20m

Non-contractual drawings.

electrical installation principle



ALWAYS, EVERLASTING GOODS

CFI - 555 Rue Benoit Frachon - 26800 PORTES-LES-VALENCE (France)
Phone : +33 (0) 475 575 500 - Email : contact@froid-cfi.com - www.froid-cfi.fr

BLUE CARE

NEGATIVE CONSERVATION CABINET

64

BLUE CARE 64 are one compartment, one door Negative Conservation Cabinets, designed to hold 600x400mm trays, for the conservation of products already at negative temperature.



technical data	
Number of doors	1
Operating temperature	-10°C to -22°C
Number of levels	20
Spacing between levels	57 mm
Gross capacity	573 L
Refrigerating power at -30°C	692 W
Fluid	R290
Unit	Built-in
Defrost	hot gas
Valve	Supplied standard with solenoid
Gross weight	150 kg
Dimensions (LxPxH)	810 x 715 x 2085 mm
Packing (LxPxH)	905 x 830 x 2138 mm
connections	
Electrical supply	220-240V / IPh+T
Frequency	50 Hz
Absorbed power	1000 W
Rated current	4,6 A
energy performance	
Energetic class	D
Energy efficiency index	59,5
Annual consumption	1794 kW/year
24h consumption	4,915 kW/h/24h
Climate class	5


Features

- + Equipped with 20 pairs of slides for 400x600mm grids.
- + AISI 304 stainless steel grids and slide rails.
- + Control with flush-mounted electronic display.
- + Self-closing door with 105° stop, right-hand hinges.
- + Lock with key.
- + Indirect-ventilated refrigeration.
- + Easily replaceable magnetic door seals.
- + AISI 304 stainless steel handle, 2mm thick.
- + 75mm thick, CFC/HCFC-free insulation.
- + AISI 304 stainless steel exterior and interior finish.
- + Galvanized/colaminated steel exterior back, bottom and interior of technical compartment.
- + Rounded internal corners for maximum hygiene.
- + Automatic ventilation shut-off when door is opened.
- + Feet in AISI 304 stainless steel, height-adjustable from 100 to 150mm.
- + LED interior lighting.
- + Optional door pedal and wheels kit.

NON CONTRACTUAL DATA

IMPLEMENTATION

DIMENSIONS AND CONNECTIONS

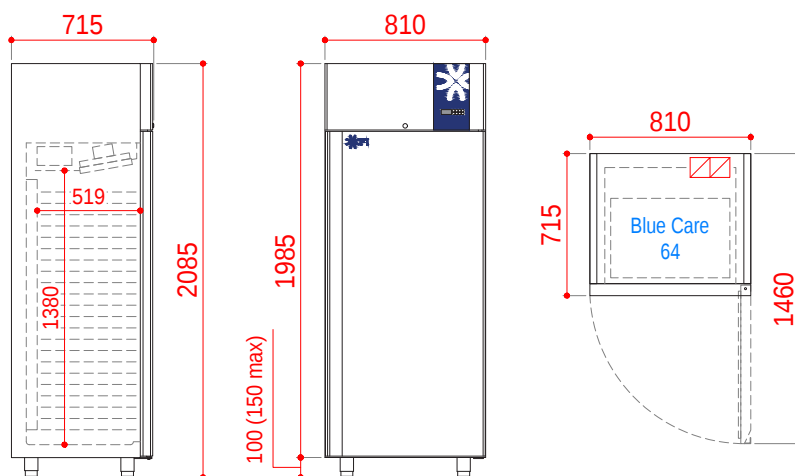


side view

front view

top view




Pavailler Solution :
Single-phase electric cable.



At customer's expense:

Wall socket.
Male and female, height 2.20m.



Benefit
limits

2.20m

Non-contractual drawings.

electrical installation principle



ALWAYS, EVERLASTING GOODS

CFI - 555 Rue Benoit Frachon - 26800 PORTES-LES-VALENCE (France)
Phone : +33 (0) 475 575 500 - Email : contact@froid-cfi.com - www.froid-cfi.fr

BLUE CARE

NEGATIVE CONSERVATION CABINET

68

BLUE CARE 68 are one compartment, one door Negative Conservation Cabinets, designed to hold 600x800mm trays, for the conservation of products already at negative temperature.




technical data	
Number of doors	1
Operating temperature	-10°C to -22°C
Number of levels	20
Spacing between levels	57 mm
Gross capacity	872 L
Refrigerating power at -30°C	692 W
Fluid	R290
Unit	Built-in
Defrost	hot gas
Valve	Supplied standard with solenoid
Gross weight	180 kg
Dimensions (LxPxH)	810 x 1015 x 2085 mm
Packing (LxPxH)	905 x 1130 x 2258 mm
connections	
Electrical supply	220-240V / IPH+T
Frequency	50 Hz
Absorbed power	1000 W
Rated current	4,6 A
energy performance	
Energetic class	D
Energy efficiency index	64
Annual consumption	2916 kW/annu
24h consumption	7,989 kW/h/24h
Climate class	5



Features

- + Equipped with 20 pairs of slides for 400x600mm grids.
- + AISI 304 stainless steel grids and slide rails.
- + Control with flush-mounted electronic display.
- + Self-closing door with 105° stop, right-hand hinges.
- + Lock with key.
- + Indirect-ventilated refrigeration.
- + Easily replaceable magnetic door seals.
- + AISI 304 stainless steel handle, 2mm thick.
- + 75mm thick, CFC/HCFC-free insulation.
- + AISI 304 stainless steel exterior and interior finish.
- + Galvanized/colaminated steel exterior back, bottom and interior of technical compartment.
- + Rounded internal corners for maximum hygiene.
- + Automatic ventilation shut-off when door is opened.
- + Feet in AISI 304 stainless steel, height-adjustable from 100 to 150mm.
- + LED interior lighting.
- + Optional door pedal and wheels kit.

NON CONTRACTUAL DATA



Wall socket.
Male and female, height 2.20m.



Non-contractual drawings.

electrical installation principle

ALWAYS, EVERLASTING GOODS

CFI - 555 Rue Benoit Frachon - 26800 PORTES-LES-VALENCE (France)
Phone : +33 (0) 475 575 500 - Email : contact@froid-cfi.com - www.froid-cfi.fr

NEGATIVE CABINET

GN 2/1 - 700L

700

The 700 Negative Conservation Cabinets, with one compartment and one door, are designed to hold GN2/1 format trays, for the conservation of products already at negative temperature.



technical data	
Number of doors	1
Operating temperature	-18°C to -22°C
Number of levels	17
Spacing between levels	75 mm
Gross capacity	601 L
Refrigerating power at -30°C	453 W
Fluid	R290
Unit	Built-in
Defrost	hot gas
Valve	Supplied standard with solenoid
Gross weight	150 kg
Dimensions (LxPxH)	740 x 815 x 2085 mm
Packing (LxPxH)	835 x 930 x 2138 mm
connections	
Electrical supply	220-240V / IPH+T
Frequency	50 Hz
Absorbed power	810 W
Rated current	3,7 A
energy performance	
Energetic class	C
Energy efficiency index	43,6
Annual consumption	1609 kW/year
24h consumption	4,408 kW/h/24h
Climate class	5


Features

- + Equipped for 3 pairs of slide rails for GN2/1 grids, 3 plastic-coated grids GN2/1.
- + AISI 304 stainless steel grids and slide rails.
- + Control with flush-mounted electronic display.
- + Self-closing door with 105° stop, right-hand hinges.
- + Lock with key.
- + Easily replaceable magnetic door seals.
- + PVC handle.
- + 75mm thick, CFC/HCFC-free insulation.
- + AISI 304 stainless steel exterior and interior finish.
- + Galvanized/colaminated steel exterior back, bottom and interior of technical compartment.
- + Rounded internal corners for maximum hygiene.
- + Feet in AISI 304 stainless steel, height-adjustable from 100 to 150mm.
- + Optional door pedal and wheels kit.

NON CONTRACTUAL DATA

IMPLEMENTATION

DIMENSIONS AND CONNECTIONS

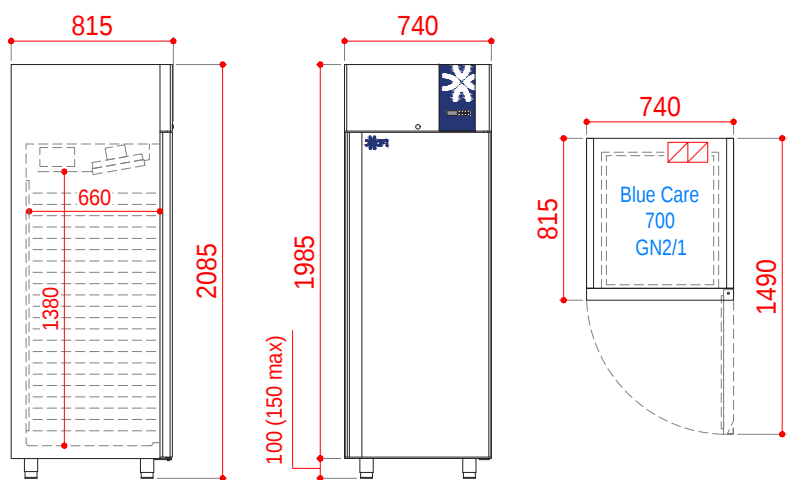


side view

front view

top view




Pavailler Solution :
Single-phase electric cable.



At customer's expense:

Wall socket.
Male and female, height 2.20m.



Benefit
limits

2.20m

Non-contractual drawings.

electrical installation principle



ALWAYS, EVERLASTING GOODS

CFI - 555 Rue Benoit Frachon - 26800 PORTES-LES-VALENCE (France)
Phone : +33 (0) 475 575 500 - Email : contact@froid-cfi.com - www.froid-cfi.fr